


Polyurethan ruller

Polyurethane pallet rollers

Ø 70-85 mm

400-1.000 kg

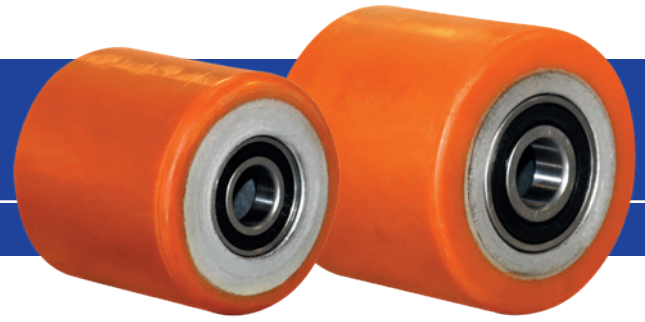

Polyurethanbane shore 92A +/-3 vulkaniseret på stålcenter.

Fås også med blødere bane, shore 78 +/-3.

Anvendelsestemperatur: -30°C til +80°C.

Polyurethane tread shore 92A +/-3 cast on steel centre.

Also available with softer tread, shore 78 +/-3.

Temperature range: -22°F to +176°F.

					VARENUMMER ARTICLE NO.			
					Ø17	Ø20	Ø25	UDEN LEJER WITHOUT BEARINGS
70	70	70	35x11	450	459102	-	-	459100
80	50	50	47x14	400	459122	459124	459126	459120
82	60	60	47x16	500	459202	459204	459206	459200
82	60	60	52x19	500	-	459212	459214	459210
82	70	70	47x16	700	459242	459244	459246	459240
82	75	75	42x24	750	-	459262	-	459260
82	75	75	47x14	750	459272	459274	459276	459270
82	90	90	47x14	800	-	459294	-	459290
82	100	100	47x16	900	459352	459354	459356	459350
82	100	100	42x24	1000	-	-	-	457360
85	62	62	47x14	600	459532	459534	459536	459530
85	70	70	47x14	700	459552	459554	459556	459550
85	75	75	47x14	750	459592	459594	459596	459590
85	78	78	52x18	780	-	459602	459604	459600
85	80	80	47x14	800	459622	459624	459626	459620
85	90	90	47x14	850	459682	459684	459686	459680
85	95	95	47x14	900	-	459697	-	459695
85	100	100	47x14	1000	459732	459734	459736	459730
85	110	110	47x32	1000	-	-	-	457740

Alle mål er i mm
All measurements are in mm

Fås også monteret i gaffler.
Belastning op til 800 kg.
Also available mounted in brackets. Load capacity up to 800 kg.

